


Woodoc Deck Sealer Specification Sheet

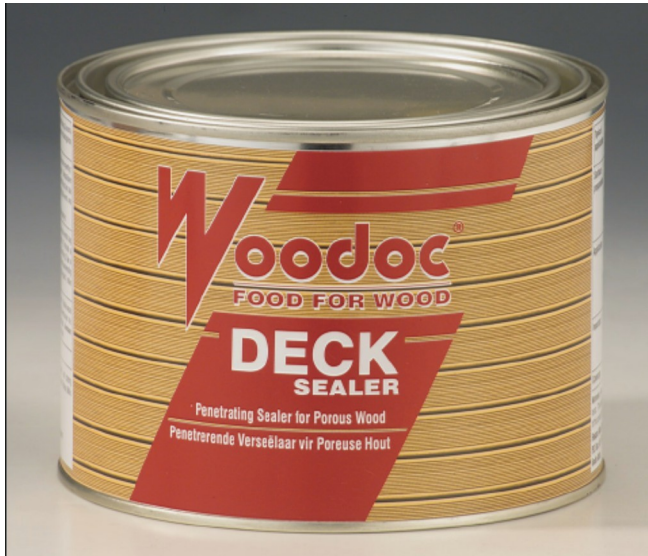

mineral turpentine before re-applying Woodoc Deck Sealer.

Typical Application:

Woodoc Deck Sealer is a tinted, low-gloss, exterior sealer with additional ultra-violet protection for use on wooden decks made of porous (soft) wood. Examples of decking timber suitable for application of Woodoc Deck Sealer is SA Pine and porous Meranti. Woodoc Deck Sealer is available in Rich Meranti, Deep Brown and Golden Brown. It is formulated specifically for use on porous wooden decks and all other exterior woodwork exposed to conditions of harsh weathering. **Please note:** Not suitable for use on Balau wood. For Balau and other dense woods, please use Woodoc Deck Dressing.

Product Features:

Woodoc Deck Sealer is alkyd based with UV absorbers and with added transparent iron oxides to protect wood against harsh sunlight.

- Excellent wind, water, pollution and salt spray protection.
- Incorporates a special alkyd base that remains flexible, preventing surface cracking associated with temperature variation.
- Superior Ultra-violet radiation protection in extreme conditions.
- High build characteristic for a smooth and attractive low-gloss surface.
- Deep penetrates to nourish wood and combat fungal growth.
- Biodegrades at the end of its life cycle.
- No need for scraping or sanding. Clean the old surface with Woodoc SteelWool and

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)
Email: information@woodoc.com or visit www.woodoc.com

Woodoc Deck Sealer Specification Sheet

No: WDS/001

Dated: 12/02/08 **Replacing:** New

Name:

Woodoc Deck Sealer - Exterior Low-Gloss Sealer
(Rich Meranti / Deep Brown / Golden Brown)

Description:

Deep penetrating, tinted, low-gloss finish with UV protection and water repellence, for outdoor use.

Coverage:

First coat 10-12m²/litre. Subsequent coats 12-14m²/litre. 3 coats (average) 3,3m²/litre.

Application:

By brush. Clean brush with mineral turpentine.

Dilution:

Dilution is not recommended, but should dilution be necessary, use only mineral turpentine.

Drying Time:

Touch Dry: 6 hours

Hard: 24 hours.

Drying will vary, depending on moisture and atmospheric conditions.

Product Properties:

Tinted, low-gloss, high build, exterior wood deck sealer with preservative and anti-fungal properties.

Wax Content:

None.

Compatibility:

Mineral Turpentine.

Non-Compatibility:

Acetone, Lacquer Thinners, Benzene, and other solvents.

Packaging:

1 litre and 5 litres.

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of the reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis.

IMPORTANT: This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:

Rekara Mills (Pty) Ltd

PO Box 16, Fort Beaufort 5720, South Africa

Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)

Email: information@woodoc.com or visit www.woodoc.com