


Woodoc 25 Specification Sheet

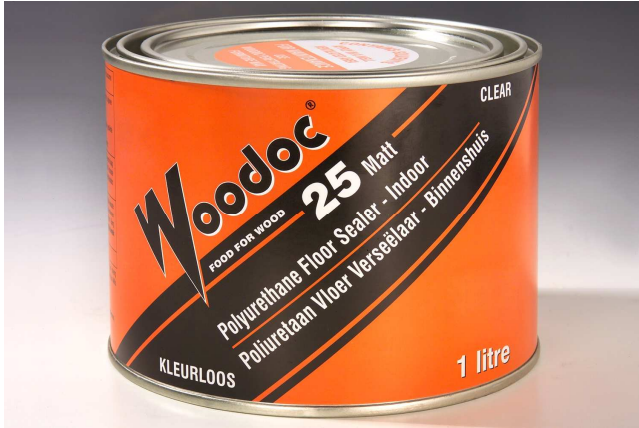

Typical Application:

Woodoc 25 Matt is a clear floor sealer suitable for application to all indoor wooden floors and stairs.

Product Features:

Woodoc 25 Matt is a clear, remarkably tough, wear resistant floor sealer. It imparts a hard wearing matt finish that enhances the colour and grain of all woods.

- Protects against scratching.
- Will not chip or flake.
- Applies easily leaving no brush marks.
- Fills the grain of open-grained woods.

NOTE: Wooden floors should preferably not be washed with water and detergent. Clean with Woodoc Penetrating Furniture Wax or apply Woodoc Antique Wax.

No: WD25/002

Dated: 09/03/07 **Replacing:** New

Name:

Woodoc 25 - Polyurethane Floor Sealer – Matt Finish.

Clear or Oregon Tinted

Description:

Fills grain of the wood and gives a hard wearing matt finish.

Coverage:

First coat 10-12m²/litre. Subsequent coats 12-14m²/litre. 3 coats (average) 3,3m²/litre.

Application:

Preferably by brush. Clean brush with mineral turpentine.

Dilution:

Dilution is not recommended, but should dilution be necessary, use only mineral turpentine.

Drying Time:

Sand: 3 - 6 hours.

Hard: 6 - 12 hours.

Drying will vary, depending on moisture and atmospheric conditions.

Product Properties:

Clear or Oregon tinted, lead-free, indoor wood sealer, with non-toxic preservative and anti-fungal properties.

Contains no formaldehyde.

Wax Content:

None.

Compatibility:

Mineral Turpentine.

Non-Compatibility:

Acetone, Lacquer Thinners, Benzene and other solvents.

Packaging:

1 litre and 5 litres.

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of the reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis.

IMPORTANT: This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:
Rekara Mills (Pty) Ltd
PO Box 16, Fort Beaufort 5720, South Africa

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)

Email: information@woodoc.com or visit www.woodoc.com

Woodoc 25 Specification Sheet

Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:
Toll free during office hours 0800 411 200 (South Africa only)
Email: information@woodoc.com or visit www.woodoc.com