


# Woodoc 2000 Specification Sheet

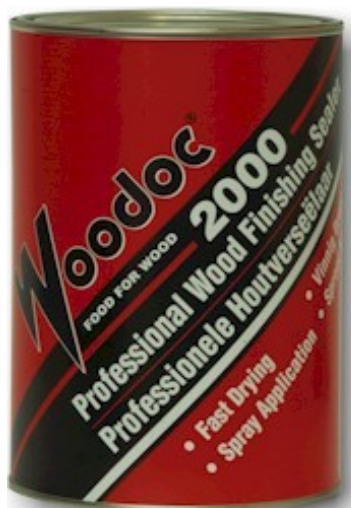

## Typical Application:

Woodoc 2000 is a quick drying, economical and tough, spray-on, single coat sealer. Woodoc 2000 may be applied by spray gun, or by brush. Viscosity of undiluted Woodoc 2000 is 70 ku. Dilute the product with mineral turpentine only, to a maximum of 10% by volume. Apply one liberal spray coat, ensuring that the surface of the timber is evenly wet all over, and remains evenly wet all over for 10 minutes after coating. Re-wet any dull spots. The coat will dry within 30 minutes to one hour depending on atmospheric conditions. The same application method may be followed for brush coating, but care should be exercised to avoid brush marks due to the quick drying nature of Woodoc 2000. Woodoc 2000 yields a very hard, scratch resistant finish.

## Product Features:

Woodoc 2000 is recommended for indoor finishes only, and is suitable for all furniture applications and interior woodwork. Woodoc 2000 is also compatible with all Woodoc Colours and Stain Concentrate additives.

- Super-hard finish.
- Quick drying: 30 minutes under normal conditions of ventilation and average humidity
- One coat spray or brush-on application.
- Fills the grain of open-grained wood.

**No:** WD2000/001

**Dated:** 20/01/03 **Replacing:** New

**Name:**

Woodoc 2000 - Professional Wood Finishing Sealer

**Description:**

Clear, Fast Drying, One-Coat, Spray Application

**Coverage:**

± 8 m<sup>2</sup> per litre, depending on wood porosity and coat thickness.

**Application:**

Spray recommended, or by brush. Clean brush and spray equipment with mineral turpentine.

**Dilution:**

Dilute the product with mineral turpentine only, to a maximum of 10% by volume.

**Drying Time:**

**Handling:** 30 minutes to one hour.

**Hard:** 12 hours.

Drying will vary, depending on moisture and atmospheric conditions.

**Product Properties:**

Clear, lead-free indoor wood sealer.

**Wax Content:**

None

**Compatibility:**

Mineral Turpentine.

**Non-Compatibility:**

Acetone, Lacquer Thinners, Benzene and other solvents.

**Packaging:**

1 litre, 5 litres and 25 litres.

**ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.**

**FLAMMABLE.** Keep out of the reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis.

**IMPORTANT:** This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:

Rekara Mills (Pty) Ltd  
PO Box 16, Fort Beaufort 5720, South Africa  
Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)  
Email: [information@woodoc.com](mailto:information@woodoc.com) or visit [www.woodoc.com](http://www.woodoc.com)