


Woodoc TRANSIT STABILIZER

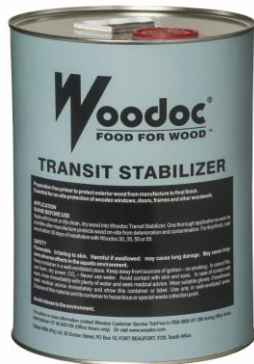

Typical Application:

A preparation-free, solvent-based primer to protect exterior wood from manufacture to final finish. Provides essential protection for on-site wooden window frames, -doors, -door frames and any other exterior woodwork.

Product Features:

One thorough application as soon as possible after manufacture protects wood against on-site soiling. It will prevent wood from warping during transit and while building. Woodoc Transit Stabilizer also helps prevent cement burn from plaster.

- Easy to apply by brush.
- Spreads easily, leaving no brush strokes.
- Also suitable for dip application.
- Suitable for all types of wood.
- Penetrates to become part of the wood.
- Does not produce a surface layer, and for a final finish, seal wood within 30 days with a Woodoc Exterior Solvent-Based Sealer.
- Complete how-to-use instructions on label.

No: WDTransit/004

Dated: 28/02/24

Name:

Woodoc Transit Stabilizer

Description:

Primer to protect exterior wood on-site. Clear/Meranti.

Application:

Brush, dip or spray.

Drying Time:

Not Applicable.

Product Properties:

Dimensionally stabilizing primer for untreated lumber and joinery.

Compatibility:

Mineral Turpentine.

Packaging:

5 litres (200 litres available on request from dealer).

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of reach of children. Harmful if ingested. Ingestion may cause chemical pneumonitis.



Manufactured in South Africa by:

Rekara Mills (Pty) Ltd

242 Main Road, Walmer, Port Elizabeth (Gqeberha)

PostNet suite #29, Private Bag x0002, The Fig Tree, CHARLO,

Port Elizabeth (Gqeberha), 6033

Customer Service:

Toll-Free during office hours: 0800 411 200 (South Africa only)

International: +27 41 555 0007 (Office Hours only)

E-mail: information@woodoc.com or visit www.woodoc.com

WhatsApp: +27 66 302 4702