



TECHNICAL DATA SHEET

Neutrarust® Wax Rust Preventative



Premium anti-corrosion multi-purpose wax

For use on ferrous and aluminium alloy components giving excellent long-term protection against rust for a wide variety of applications in marine, automotive, machinery and industrial, for indoor storage or outdoor transportation. Ideal for internal cavities.

It is a wax base multi-purpose corrosion preventive solution suitable for a wide range of application requirements for vehicle rust proofing, and protection of machinery and parts. Cures to a dark amber-coloured translucent firm film. Provides a resilient, self-healing coating with exceptional protection against weather and aggressive environments.


Key features

- Excellent resistance to water
- Up to 5 times longer protection compared with many other waxes
- Good coverage
- Heavy flexible film giving chemical and physical protection
- Universal application
- Cost effective



Protect the environment

Comply with local regulations. Do not discharge into drains, soil or water.
SDS is available upon request.
Available in 1 and 5 litres.

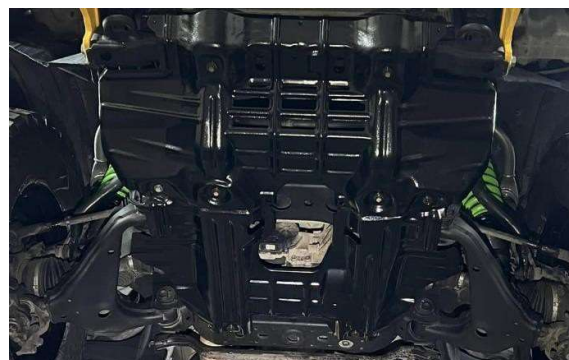

For more information, email information@woodoc.com

Visit www.woodoc.com



TECHNICAL DATA SHEET

Neutrast[®] Wax Rust Preventative

Application

Surface preparation: The maximum performance of Neutrast Wax can be achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale and a temperature of between 10°C and 35°C at the time of product application.

Gentle stirring is recommended prior to use. Do not dilute

Brush: Liberally apply to components and before handling, allow to dry for up to 24 hours depending on drying conditions. Avoid getting bristles into coating.

Spray: Can be sprayed using most types of conventional application methods to achieve the recommended coating thickness. May be injected into cavities and box sections via flexible or rigid lances either at room temperature or at 40 – 50°C using re-circulating pumping equipment.

Coverage approx. 14 m² per litre. Depending on application temperature.

Estimated protection period

Indoors & covered outdoors: up to 5 years

Outdoors: up to 3 years

Removal

Neutrast Wax can be removed with mineral turpentine or any similar petroleum solvent, hot alkaline wash or low-pressure steam.

Storage

Neutrast Wax should be stored in a ventilated area at temperatures between 10°C and 35°C. Keep container tightly closed. Protect from frost.

For more information, email information@woodoc.com

Visit www.woodoc.com